



FEATURES

- Oil free
- Maintenance free design
- Operates quietly at a maximum 70 dB(A)
- Cooler running outboard bearings increase service life
- Built-in particulate filters and silencers
- Compact light-weight design
- Handles vacuum and/or pressure applications
- Ideal alternative to standard oil sealed rotary vane pumps

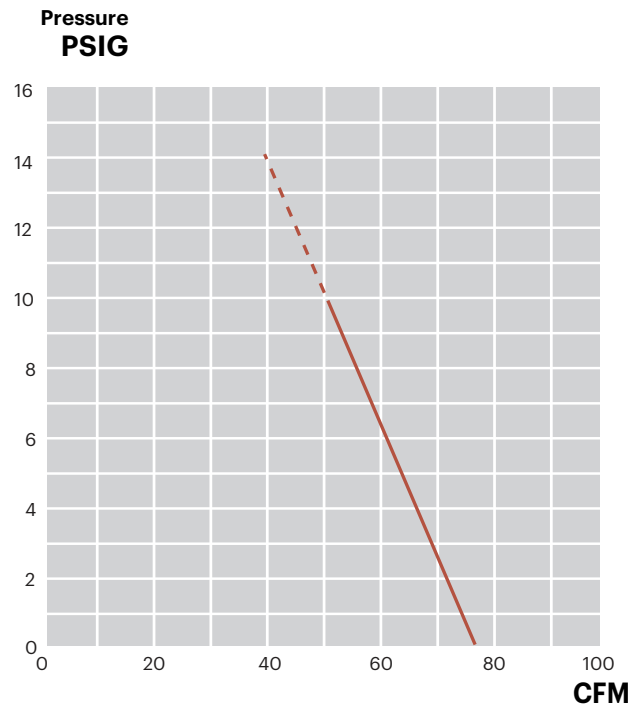

Performance Curves: 60Hz

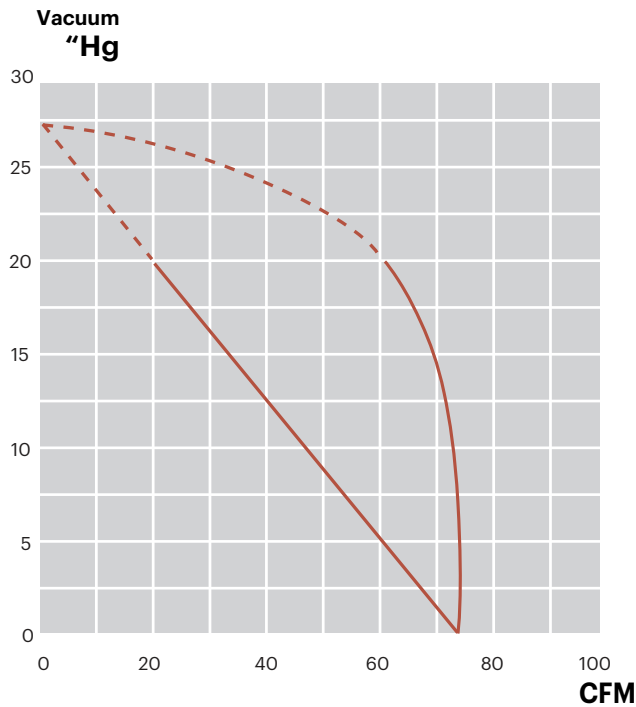


AIRTECH, INC.

RUTHERFORD, NJ 07070
WWW.AIRTECHUSA.COM
TEL: (888) 222-9940
FAX: (201) 569-1696

NOTES

- o Standard voltage for three phase pumps is 208-230/460V 3ph 60Hz.
- o Standard voltage for single phase pumps is 115/230/1ph 50/60Hz, or 115V/1ph 60Hz, or 230V/1ph 60Hz
- o All pumps available in 50Hz frequency and with other voltages.

DIMENSIONS (INCHES)

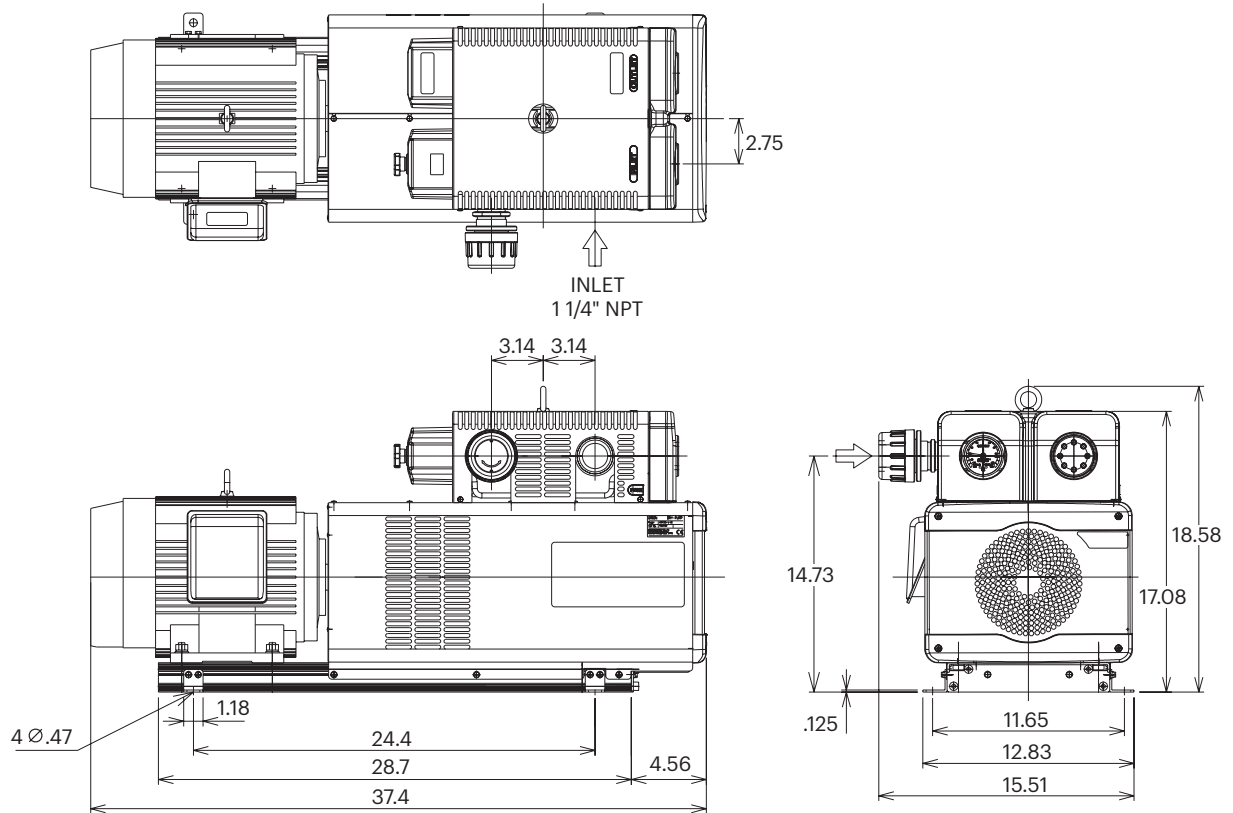

SPECIFICATIONS (VACUUM)

Model	Motor	RPM	HP	CFM	Max. "Hg	LBS	Noise Level
KRF110-G	No motor			78	27.5"	240	75 dB(A)
KRF110-G1	208-230/460V	1200	5.0	78	27.5"	280	75 dB(A)
KRF110-G4	115/230V	1200	5.0	78	27.5"	310	75 dB(A)

SPECIFICATIONS (PRESSURE)

Model	Motor	RPM	HP	CFM	Max. PSI	LBS	Noise Level
KRF110-G	No motor			78	14	240	75 dB(A)
KRF110-G1	208-230/460V	1200	5.0	78	14	280	75 dB(A)
KRF110-G4	115/230V	1200	5.0	78	14	310	75 dB(A)

AIRTECH, INC.

RUTHERFORD, NJ 07070
WWW.AIRTECHUSA.COM
TEL: (888) 222-9940
FAX: (201) 569-1696